

ARMY RESEARCH LABORATORY



Dispersion Reduction of a Direct-Fire Rocket Using Lateral Pulse Jets

by Thanat Jitpraphai and Mark Costello

ARL-CR-465

April 2001

prepared by

Thanat Jitpraphai and Mark Costello
Oregon State University
Corvallis, Oregon 97331

under contract

DAAD17-00-P-0853

20010508 018

Approved for public release; distribution is unlimited.

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Citation of manufacturer's or trade names does not constitute an official endorsement or approval of the use thereof.

Destroy this report when it is no longer needed. Do not return it to the originator.

Army Research Laboratory

Aberdeen Proving Ground, MD 21005-5066

ARL-CR-465

April 2001

Dispersion Reduction of a Direct-Fire Rocket Using Lateral Pulse Jets

Thanat Jitpraphai and Mark Costello
Oregon State University

Approved for public release; distribution is unlimited.

Abstract

The impact point dispersion of a direct-fire rocket can be drastically reduced with a ring of appropriately sized lateral pulse jets coupled to a trajectory tracking flight control system. The system is shown to work well against uncertainty in the form of initial off-axis angular velocity perturbations as well as atmospheric winds. In an example case, dispersion was reduced by a factor of 100. Dispersion reduction is a strong function of the number of individual pulse jets, the pulse jet impulse, and the trajectory tracking window size. Properly selecting these parameters for a particular rocket and launcher combination is required to achieve optimum dispersion reduction. For relatively low pulse jet impulse, dispersion steadily decreases as the number of pulse jets is increased or as the pulse jet impulse is increased. For a fixed total pulse jet ring impulse, a single pulse is the optimum pulse jet configuration when the pulse jet ring impulse is small due to the fact that the effect of a pulse on the trajectory of a rocket decreases as the round flies down range.

Contents

List of Figures	v
1. Introduction	1
2. Direct-Fire Rocket Dynamic Model	2
3. Direct-Fire Rocket Flight Control System	5
4. Results	8
5. Conclusions	19
6. References	21
List of Symbols	23
Distribution List	25
Report Documentation Page	27

INTENTIONALLY LEFT BLANK.

List of Figures

Figure 1. Schematic of a direct-fire rocket with a lateral pulse jet.....	2
Figure 2. Trajectory tracking flight control system.....	6
Figure 3. ith individual lateral pulse jet firing logic.....	7
Figure 4. Altitude vs. range.....	9
Figure 5. Cross range vs. range.	9
Figure 6. Trajectory tracking error vs. time.	10
Figure 7. Pulse jet firing time.....	10
Figure 8. Roll angle vs. time.....	11
Figure 9. Angle vs. time.....	11
Figure 10. Euler pitch angle vs. time.	12
Figure 11. Aerodynamic angle of attack vs. time.....	12
Figure 12. Dispersion radius vs. number of pulse jets and trajectory tracking window size (total ring impulse = 80 N-s).	13
Figure 13. Impact point dispersion (perturbed initial pitch and yaw rate).....	14
Figure 14. Dispersion radius vs. number of pulse jets and pulse jet impulse (trajectory tracking window size = 1.5 m).....	15
Figure 15. Dispersion radius vs. number of pulse jets and pulse jet impulse (trajectory tracking window size = 3.0 m).....	16
Figure 16. Dispersion radius vs. number of pulse jets and pulse jet impulse (trajectory tracking window size = 4.5 m).....	16
Figure 17. Dispersion radius vs. number of pulse jets and total ring impulse (trajectory tracking window size = 3.0 m).....	17
Figure 18. Dispersion radius vs. atmospheric wind direction for the uncontrolled rocket (atmospheric wind speed = 7.6 m/s, number of pulse jets = 32, pulse jet impulse = 20 N-s, trajectory tracking window size = 1.5 m).	18
Figure 19. Dispersion radius vs. atmospheric wind direction for the controlled rocket (atmospheric wind speed = 7.6 m/s, number of pulse jets = 32, pulse jet impulse = 20 N-s, trajectory tracking window size = 1.5 m).	19

INTENTIONALLY LEFT BLANK.

1. Introduction

Uncontrolled direct fire rockets exhibit high impact point dispersion, even at relatively short range, and as such have been employed as area weapons on the battlefield. Because direct fire rockets exit the launcher with low velocity, any aerodynamic disturbances presented to the rocket near the launcher create relatively large angles of attack, leading to large aerodynamic jump and increased target dispersion. Furthermore, main rocket motor thrust during the initial portion of flight tends to amplify the effect of initial transverse and angular velocity perturbations on dispersion. The integrated effect over the trajectory of initial disturbances as the rocket enters atmospheric flight and high sensitivity to atmospheric disturbances all lead to large impact point dispersion.

Increased design requirements being placed on direct fire ammunition, including direct fire rockets, call for surgical removal of select targets on the battlefield. Economic realities now stipulate that improved capability be delivered at reduced unit cost. Small, rugged, and inexpensive microelectromechanical sensors (MEMS) coupled to a suitable and inexpensive control mechanism offer the potential to meet these increasingly stringent design requirements. A potential control mechanism that is small, durable, and can be located in close proximity to the sensor suite is a lateral pulse jet ring mounted forward on the rocket body. The pulse jet ring consists of a finite number of individual pulse jets. Each pulse jet on the ring imparts a single, short duration, large force to the rocket in the plane normal to the rocket axis of symmetry.

Several investigators have explored the loads caused by a lateral pulse jet on a projectile body. Srivastava [1] showed good agreement between computational and experimental results for the normal force and pitching moment of a lateral jet operating on a supersonic missile. Later, Srivastava [2] showed that lateral thrust jet effectiveness diminished as the jet thruster was gradually rolled toward the windward side of the missile. Brandeis and Gill [3] performed an experimental investigation of effect of a lateral jet on the forces and moments on a supersonic missile. They showed that jet force amplification strongly depends on the size and location of lifting surfaces of the missile and that jet force amplification is inversely proportional to jet pressure. Using lateral pulse jets to improve target dispersion performance has been investigated by Harkins and Brown [4]. They used a set of lateral pulse jets to eliminate the off-axis angular rate of the projectile just after exiting the launcher. For the notional concepts considered, dispersion was reduced by a factor of four.

The work reported here seeks to reduce the dispersion of an atmospheric rocket using a trajectory tracking flight control system. Pulse jet firing logic is engaged when the trajectory tracking error exceeds a specific threshold. Parametric trade studies that consider the effect of the number of pulse jets, pulse jet impulse, and trajectory tracking window size on impact point dispersion were conducted.

2. Direct-Fire Rocket Dynamic Model

The numerical simulation employed in this study consists of a rigid body six degree of freedom model typically utilized in flight dynamic modeling of projectiles. A schematic of the direct-fire rocket configuration with major elements of the system identified is given in Figure 1. The degrees of freedom include three position components of the mass center of the rocket as well as three Euler orientation angles of the body. The equations of motion are provided in equations 1-4 [5, 6].

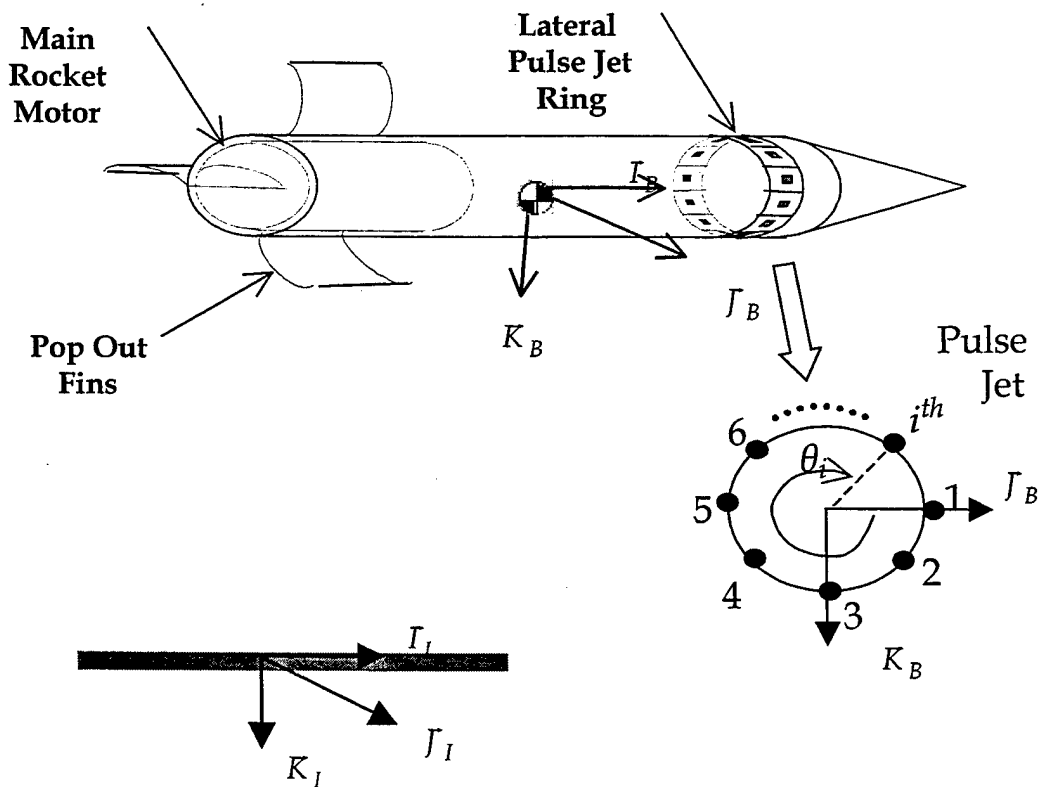


Figure 1. Schematic of a direct-fire rocket with a lateral pulse jet.

$$\begin{Bmatrix} \dot{x} \\ \dot{y} \\ \dot{z} \end{Bmatrix} = \begin{bmatrix} c_\theta c_\psi & s_\phi s_\theta c_\psi - c_\phi s_\psi & c_\phi s_\theta c_\psi + s_\phi s_\psi \\ c_\theta s_\psi & s_\phi s_\theta s_\psi + c_\phi c_\psi & c_\phi s_\theta s_\psi - s_\phi c_\psi \\ -s_\theta & s_\phi c_\theta & c_\phi c_\theta \end{bmatrix} \begin{Bmatrix} u \\ v \\ w \end{Bmatrix}. \quad (1)$$

$$\begin{Bmatrix} \dot{\phi} \\ \dot{\theta} \\ \dot{\psi} \end{Bmatrix} = \begin{bmatrix} 1 & s_\phi t_\theta & c_\phi t_\theta \\ 0 & c_\phi & -s_\phi \\ 0 & s_\phi / c_\theta & c_\phi / c_\theta \end{bmatrix} \begin{Bmatrix} p \\ q \\ r \end{Bmatrix}. \quad (2)$$

$$\begin{Bmatrix} \dot{u} \\ \dot{v} \\ \dot{w} \end{Bmatrix} = \begin{Bmatrix} X/m \\ Y/m \\ Z/m \end{Bmatrix} - \begin{bmatrix} 0 & -r & q \\ r & 0 & -p \\ -q & p & 0 \end{bmatrix} \begin{Bmatrix} u \\ v \\ w \end{Bmatrix}. \quad (3)$$

$$\begin{Bmatrix} \dot{p} \\ \dot{q} \\ \dot{r} \end{Bmatrix} = [I]^{-1} \begin{Bmatrix} L \\ M \\ N \end{Bmatrix} - \begin{bmatrix} 0 & -r & q \\ r & 0 & -p \\ -q & p & 0 \end{bmatrix} [I] \begin{Bmatrix} p \\ q \\ r \end{Bmatrix}. \quad (4)$$

The applied loads appearing in equation 3 contain contributions from rocket weight (w), air loads (a), main rocket thrust (r), and lateral pulse jet forces (j).

$$\begin{Bmatrix} X \\ Y \\ Z \end{Bmatrix} = \begin{Bmatrix} X_w \\ Y_w \\ Z_w \end{Bmatrix} + \begin{Bmatrix} X_a \\ Y_a \\ Z_a \end{Bmatrix} + \begin{Bmatrix} X_r \\ Y_r \\ Z_r \end{Bmatrix} + \begin{Bmatrix} X_j \\ Y_j \\ Z_j \end{Bmatrix}. \quad (5)$$

The rocket weight contribution is given by equation 6,

$$\begin{Bmatrix} X_w \\ Y_w \\ Z_w \end{Bmatrix} = mg \begin{Bmatrix} -s_\theta \\ s_\phi c_\theta \\ c_\phi c_\theta \end{Bmatrix}, \quad (6)$$

while the air loads contribution, which acts at the center of pressure of the rocket, is given by equation 7.

$$\begin{Bmatrix} X_a \\ Y_a \\ Z_a \end{Bmatrix} = -\frac{\pi}{8} \rho V_A^2 D^2 \begin{Bmatrix} C_{X0} + C_{X2} (v_A^2 + w_A^2) / V_A^2 \\ C_{NA} v_A / V_A \\ C_{NA} w_A / V_A \end{Bmatrix}. \quad (7)$$

The main rocket motor increases the velocity of the rocket by providing high thrust levels during the initial portion of the trajectory. In some direct-fire rocket designs, the exhaust nozzle contains several flutes such that the exiting flow is turned, causing (in aggregate) a rolling moment. To account for this effect, the numerical simulation models the main rocket motor as a set of four smaller rocket motors that act as point forces on the body. The position and thrust

orientation of each small rocket motor on the body are determined to match known inertial properties before and after burn and to match a specified roll time trace. Equation 8 provides the main rocket motor force formula.

$$\begin{Bmatrix} X_R \\ Y_R \\ Z_R \end{Bmatrix} = \sum_{i=1}^4 T_{Ri} \begin{Bmatrix} n_{RXi} \\ n_{RYi} \\ n_{RZi} \end{Bmatrix}. \quad (8)$$

In equation 8, the thrust amplitude profile, T_{Ri} , is a known function of time. The lateral pulse jet forces are modeled in the same manner as the main rocket motor with two exceptions. Since the lateral pulse jets are active over a very short duration of time compared to the time scale of a complete rocket trajectory, the thrust force is modeled as a constant when active. Also, since by definition a lateral pulse jet acts in the \bar{j}_B and \bar{k}_B plane, the \bar{i}_B component of the lateral pulse jet force is zero. Equation 9 provides the lateral pulse jet force formula.

$$\begin{Bmatrix} X_J \\ Y_J \\ Z_J \end{Bmatrix} = \sum_{i=1}^{n_J} T_{Ji} \begin{Bmatrix} 0 \\ -\cos(2\pi(i-1)/n_J) \\ -\sin(2\pi(i-1)/n_J) \end{Bmatrix}. \quad (9)$$

The pulse jet ring is located on the skin of the projectile and near the nose of the rocket. Individual pulse jets are uniformly distributed azimuthally around the lateral pulse jet ring. A key feature of the pulse jet configuration considered here is that each pulse jet can be fired only once.

The applied moments about the rocket mass center contains contributions from steady air loads ($_{SA}$), unsteady air loads ($_{UA}$), main rocket thrust ($_R$), and lateral pulse jet forces ($_J$).

$$\begin{Bmatrix} L \\ M \\ N \end{Bmatrix} = \begin{Bmatrix} L_{SA} \\ M_{SA} \\ N_{SA} \end{Bmatrix} + \begin{Bmatrix} L_{UA} \\ M_{UA} \\ N_{UA} \end{Bmatrix} + \begin{Bmatrix} L_R \\ M_R \\ N_R \end{Bmatrix} + \begin{Bmatrix} L_J \\ M_J \\ N_J \end{Bmatrix}. \quad (10)$$

The moment components due to steady aerodynamic forces, main rocket motor forces, and lateral pulse jet forces are computed with a cross product between the distance vector from the mass center of the rocket and the location of the specific force and the force itself. The unsteady body aerodynamic moment provides a damping source for projectile angular motion and is given by equation 11.

$$\begin{Bmatrix} L_{UA} \\ M_{UA} \\ N_{UA} \end{Bmatrix} = \frac{\pi}{8} \rho V_A^2 D^3 \begin{Bmatrix} C_{DD} + \frac{pDC_{LP}}{2V_A} \\ \frac{qDC_{MQ}}{2V_A} \\ \frac{rDC_{MQ}}{2V_A} \end{Bmatrix}. \quad (11)$$

When the rocket motors are active, the mass, mass center location, and inertial properties of the rocket are updated continuously. The center of pressure location and all aerodynamic coefficients depend on local Mach number. The air velocity of the mass center of the rocket includes contributions from inertial motion of the round and atmospheric mean wind. The mean atmospheric wind acts in the horizontal plane and is directed at an angle ψ_{MW} from the \vec{i}_1 axis.

$$\begin{Bmatrix} u_A \\ v_A \\ w_A \end{Bmatrix} = \begin{Bmatrix} u \\ v \\ w \end{Bmatrix} + \begin{bmatrix} c_\theta c_\psi & c_\theta s_\psi & -s_\theta \\ s_\phi s_\theta c_\psi - c_\phi s_\psi & s_\phi s_\theta s_\psi + c_\phi c_\psi & s_\phi c_\theta \\ c_\phi s_\theta c_\psi + s_\phi s_\psi & c_\phi s_\theta s_\psi - s_\phi c_\psi & c_\phi c_\theta \end{bmatrix} \begin{Bmatrix} V_{MW} c_{\psi_{MW}} \\ V_{MW} s_{\psi_{MW}} \\ 0 \end{Bmatrix}. \quad (12)$$

As shown in equation 13, the magnitude of the atmospheric mean wind velocity is a function of projectile altitude.

$$V_{MW} = 0.636619 \sigma_{MW} \tan^{-1} \left(\frac{z}{1000} \right). \quad (13)$$

In equation 13, σ_{MW} is the mean wind intensity.

3. Direct-Fire Rocket Flight Control System

The flight control system seeks to track a prespecified command trajectory utilizing the control authority provided by the lateral pulse jets. A schematic of the flight control system block diagram is shown in Figure 2, while a schematic of the lateral pulse jet firing logic is given in Figure 3. For direct-fire rockets, a command ballistic trajectory is available from the fire control system and can be downloaded to the round just prior to launch. The trajectory tracking flight control system first compares the measured position of the projectile to the commanded trajectory to form a position error vector in the inertial frame. The trajectory error is converted to the rocket body frame using equation 14.

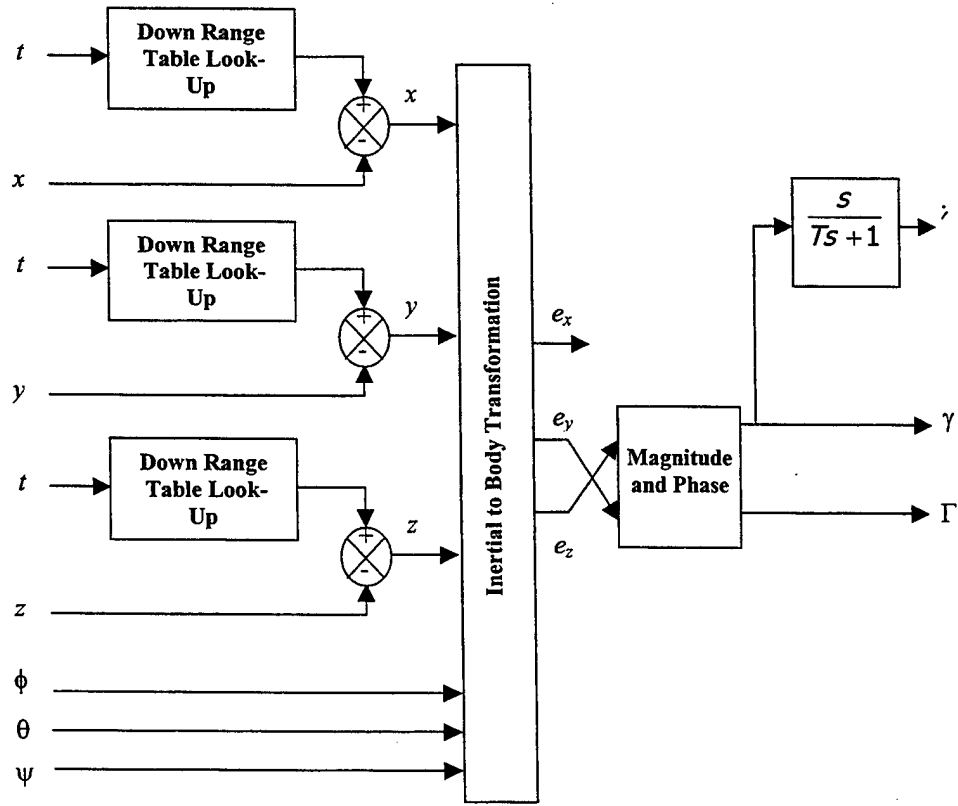


Figure 2. Trajectory tracking flight control system.

$$\begin{Bmatrix} e_x \\ e_y \\ e_z \end{Bmatrix} = \begin{bmatrix} c_\theta c_\psi & c_\theta s_\psi & -s_\theta \\ s_\phi s_\theta c_\psi - c_\phi s_\psi & s_\phi s_\theta s_\psi + c_\phi c_\psi & s_\phi c_\theta \\ c_\phi s_\theta c_\psi + s_\phi s_\psi & c_\phi s_\theta s_\psi - s_\phi c_\psi & c_\phi c_\theta \end{bmatrix} \begin{Bmatrix} x_c - x \\ y_c - y \\ z_c - z \end{Bmatrix}. \quad (14)$$

The magnitude and phase of the error in the off-axis plane of the rocket are denoted Γ and γ , and are defined by equations 15 and 16, respectively.

$$\Gamma = \sqrt{e_x^2 + e_y^2}. \quad (15)$$

$$\gamma = \tan^{-1}(e_z / e_y). \quad (16)$$

At each computation cycle in the flight control system, a sequence of checks are conducted that govern firing individual lateral pulse jets. The conditions that must be satisfied for an individual lateral pulse jet to fire are as follows:

- (1) The magnitude of the off-axis trajectory tracking error must be greater than a specified distance.

$$\Gamma > e_{\text{THRES}}. \quad (17)$$

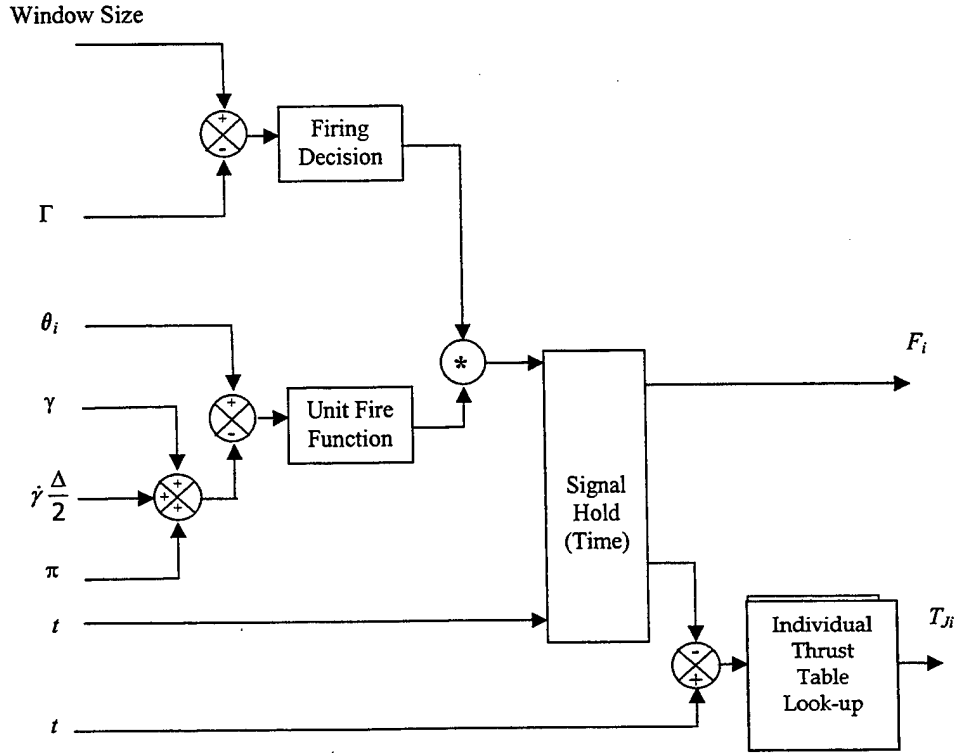


Figure 3. i th individual lateral pulse jet firing logic.

- (2) The time elapsed since the last lateral pulse jet firing must be greater than a specified duration.

$$t - t^* > \Delta t_{\text{THRES}} \quad (18)$$

- (3) The projected angle between the trajectory tracking error and the individual pulse jet force under consideration is less than a specified angle.

$$|\theta_i - \pi - \gamma - \dot{\gamma} \Delta_{PJ}| Z > \delta_{\text{THRES}} \quad (19)$$

- (4) The individual pulse jet under consideration has not been fired.

The first two checks are valid for all lateral pulse jets, while the last two checks are specific to a given lateral pulse jet. The flight control system contains only three parameters that must be tuned to a specific application, namely, the tracking error window size, the required elapsed time between pulse jet firings, and the angle tolerance between the tracking error and the individual pulse jet force.

4. Results

To investigate the ability of a lateral pulse jet ring to reduce impact point dispersion, the equations of motion described above are numerically integrated using a fourth order Runge-Kutta algorithm. The rocket configuration used in the simulation study to follow is a representative direct-fire rocket that is a 1.4-m-long, fin-stabilized rocket with three popout fins on the rear of the round. The lateral pulse jet ring is located 1.16 m from the base of the rocket. The main rocket motor burns for 1.12 s and imparts an impulse to the rocket of 6,212 N-s. During the main rocket motor burn, the forward velocity of the rocket is increased from 43.7 m/s to 767.5 m/s. The rocket weight, mass center location from the base of the rocket, roll inertia, and pitch inertia before and after burn is 10.4/7.21 kg, 0.85/0.86 m, 0.0077/0.0058 kg m², and 1.83/1.61 kg m², respectively. Nominally, the rocket exits the launcher with the following initial conditions: $x = 0.0$ m, $y = 0.0$ m, $z = -30.5$ m, $\phi = 0.0$ deg, $\theta = 4.14$ deg, $\psi = 0.0$ deg, $u = 43.7$ m/s, $v = 0.0$ m/s, $w = 0.11$ m/s, $p = 51.5$ rad/s, $q = -0.18$ rad/s, and $r = 0.0$ rad/s.

Figures 4-11 compare uncontrolled and controlled trajectories for the example rocket configuration against a nominal command trajectory. The ring contains 32 individual lateral pulse jets, where each individual pulse jet imparts an impulse of 20 N-s on the projectile body over a time duration of 0.01 s. The rocket is launched at an altitude of 30 m toward a target on the ground, and the altitude and cross range equal zero at a range of 3000 m. The trajectory tracking window size is set to 1.5 m, while the pulse jet elapsed time threshold is set to 0.2 s. The pulse jet angle threshold is set to 2°. Figures 4 and 5 plot rocket altitude and cross range vs. range. At the target range of 3,000 m, the uncontrolled rocket altitude error is slightly greater than 110 m, while the cross range error is more than 100 m. Compared to the uncontrolled trajectory, the controlled rocket trajectory follows the commanded trajectory well, with an impact error on the order of a couple meters. The off-axis trajectory tracking error, Γ , is plotted in Figure 6. While the uncontrolled rocket trajectory error is greater than 100 m, the trajectory tracking error for the lateral pulse jet controlled rocket remains under 6 m for the entire flight. The sequence of lateral pulse jet firing times is depicted in Figure 12. Twenty two of the possible 32 lateral pulse jets are fired in this particular example. Notice that pulses are fired at a rate that does not exceed 0.2 s. The minimum required time between successive pulses, Δt_{THRES} , is an important design parameter of the flight control system. If Δt_{THRES} is set too low, the rocket does not have sufficient time to respond and many

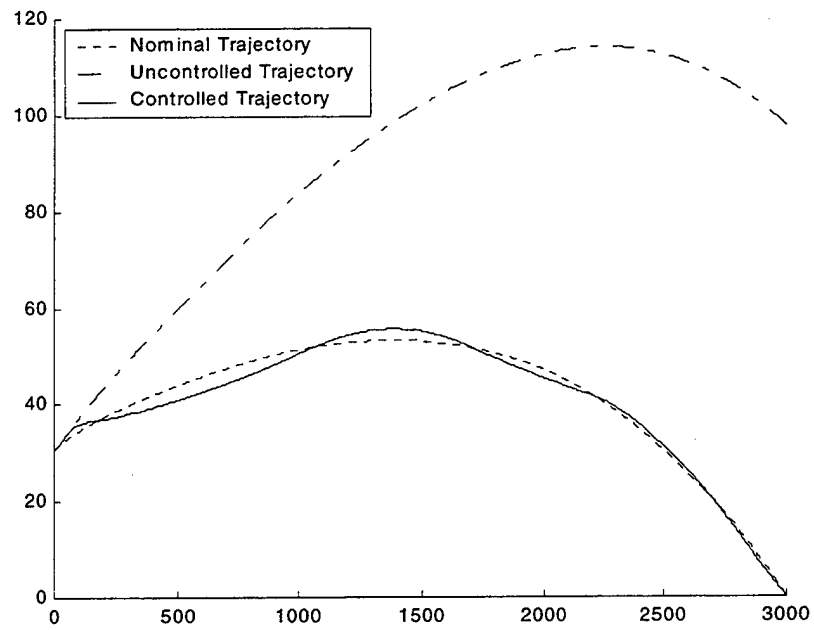


Figure 4. Altitude vs. range.

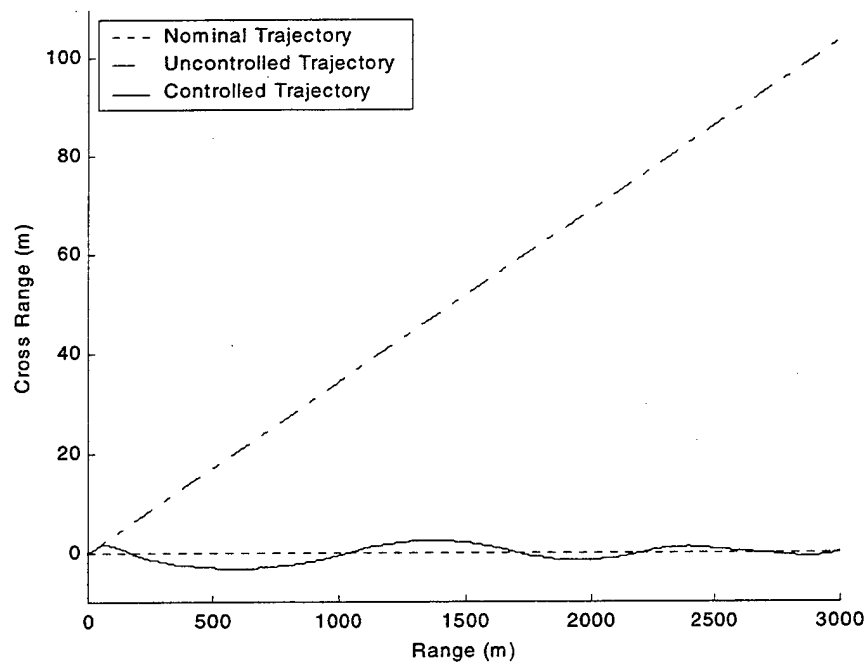


Figure 5. Cross range vs. range.

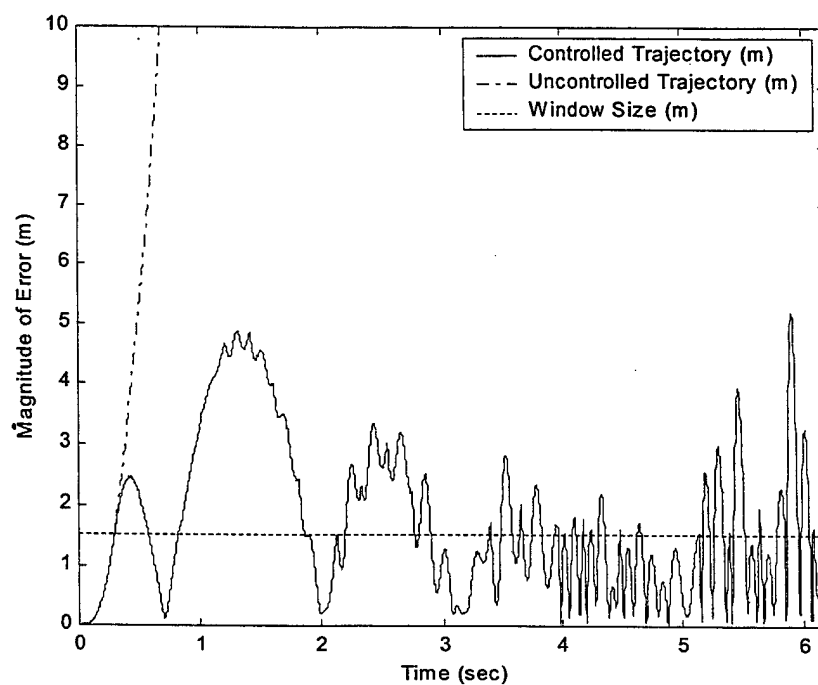


Figure 6. Trajectory tracking error vs. time.

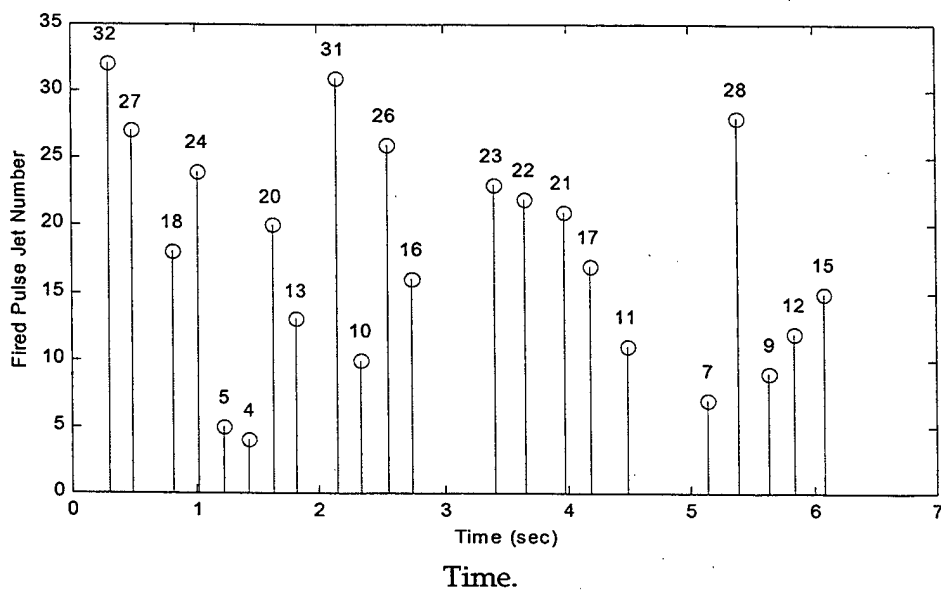


Figure 7. Pulse jet firing time.

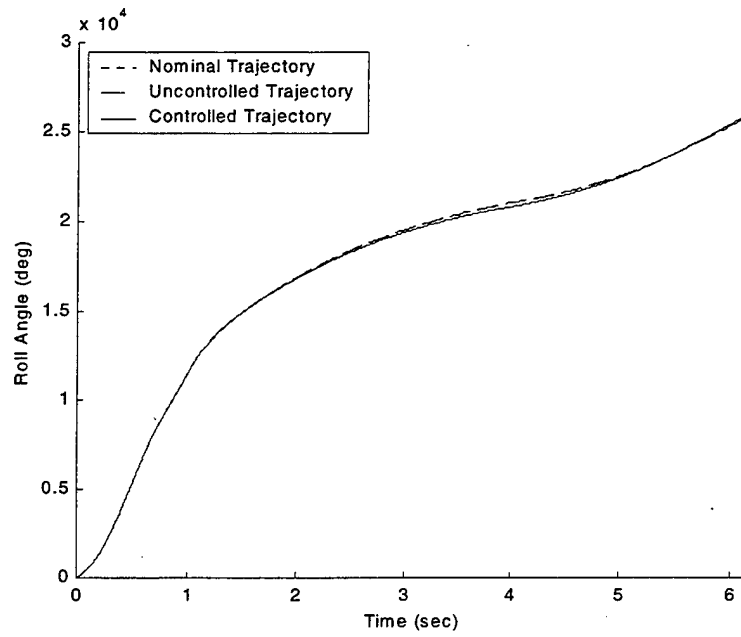


Figure 8. Roll angle vs. time.

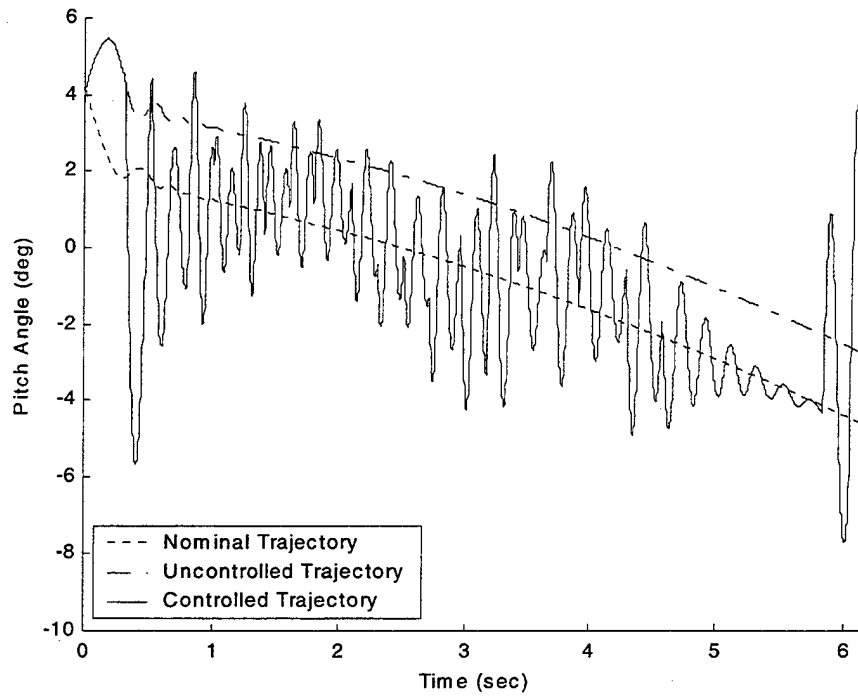


Figure 9. Angle vs. time.

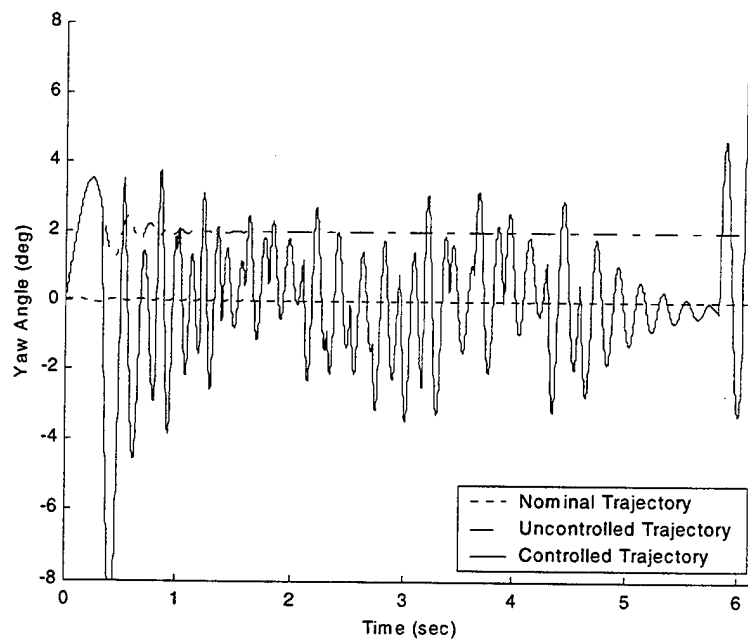


Figure 10. Euler pitch angle vs. time.

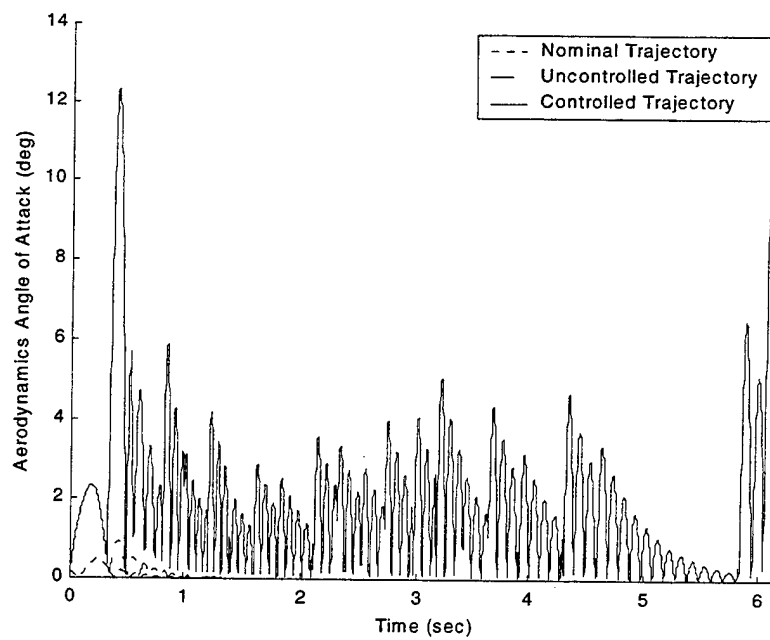


Figure 11. Aerodynamic angle of attack vs. time.

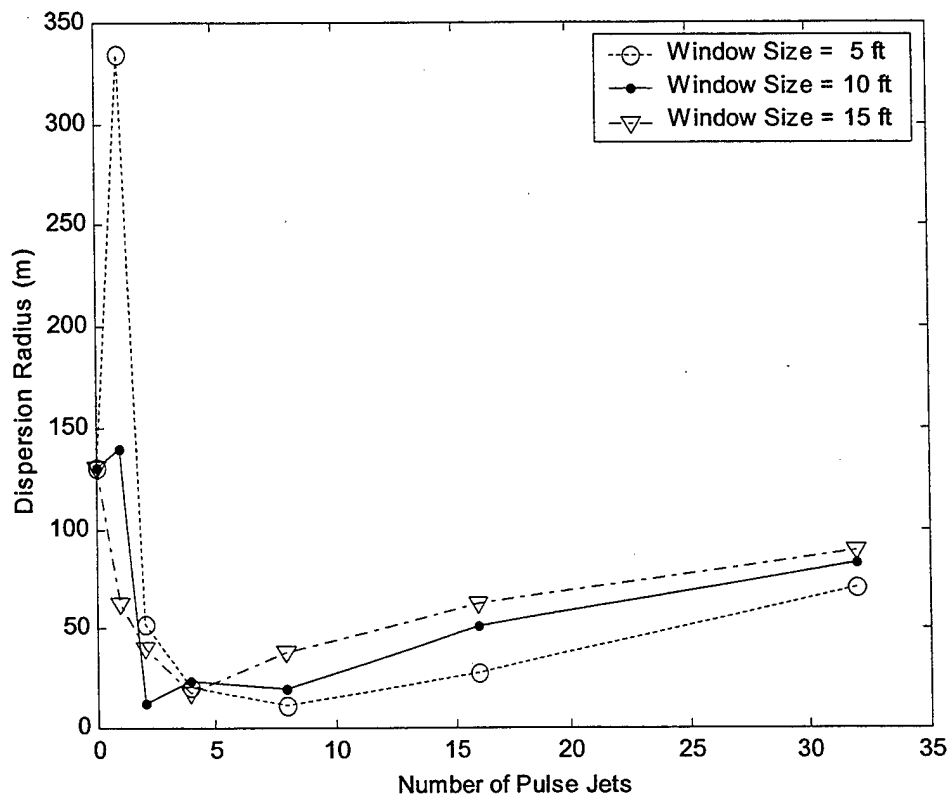


Figure 12. Dispersion radius vs. number of pulse jets and trajectory tracking window size (total ring impulse = 80 N-s).

pulses will be fired, tending to over compensate for trajectory errors. On the other hand, if Δt_{THRES} is set too high, then only a small number of pulses can possibly be fired and control authority is wasted. In this instance, trajectory tracking will tend to build without pulse jet corrective action.

The roll angle time history is shown in Figure 8; the roll response is essentially unaffected by the action of the lateral pulse jets as both the controlled and uncontrolled roll angle time histories are approximately equal. A comparison of pitch attitude for the uncontrolled and controlled trajectories is provided in Figure 9. While the nominal and uncontrolled trajectories show a steady decrease in pitch attitude as the rocket flies down range, the controlled trajectory shows oscillatory response due to the firing of pulse jets. Total pitch angle excursions of greater than 10° are experienced toward the end of the trajectory. Similar oscillations are seen in the yaw angle time history shown in Figure 10. The aerodynamic angle of attack of the nominal, uncontrolled, and controlled cases are shown in Figure 11. While the angle of attack for the nominal and uncontrolled cases remains relatively small, under 2.5° , the action of pulse jets induces angles of attack greater than 10° near the target.

The initial state of the rocket as it exits the launcher and enters free flight can be viewed as a random process. The random nature of the initial free flight state stems from many effects, but perhaps, most notably from launcher and rocket manufacturing tolerances combined with resulting launcher and rocket vibration. Random perturbations in initial free flight conditions create target dispersion impact points. Furthermore, for direct-fire rockets, perturbations in initial off-axis angular rates have been found to significantly contribute to the impact point error budget [7, 8]. Figure 13 compares impact points at a range of 3,000 m for the uncontrolled and controlled direct-fire rocket configurations with a sample size of 50, where the initial pitch rate and yaw rate are independent Gaussian random variables. The mean value for pitch and yaw rate is -0.18 rad/s and 0 rad/s, respectively. The standard deviation for both pitch and yaw rate is 0.3 rad/s. The dispersion radius is defined as the radius of a circle that emanates from the mean impact point and contains 67% of the impact points. The large circle in Figure 12 is the dispersion radius for the uncontrolled case, which is equal to 130.3 m, while the dispersion radius for the controlled case is 1.3 m and is not noticeable on the figure.

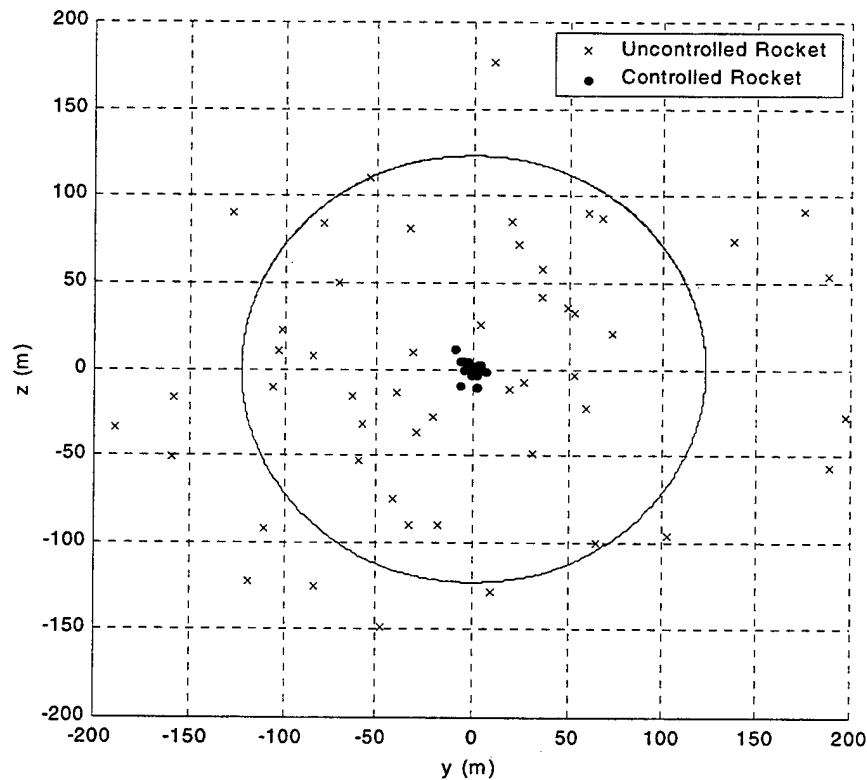


Figure 13. Impact point dispersion (perturbed initial pitch and yaw rate).

Figures 14–16 show the relationship between dispersion radius, number of pulse jets on the ring, and individual pulse jet impulse for three different trajectory tracking window sizes of 1.5 m, 3.0 m, and 4.5 m. As the number of individual pulse jets is increased, the total impulse contained in the pulse jet ring is increased. In each graph, the trajectory tracking window size is shown as a constant dashed line. When the impulse for the individual lateral pulse jets is small, dispersion radius is steadily reduced as the number of pulse jets or the jet impulse is increased. When the individual lateral pulse jet impulse is relatively large, adding more pulse jets can actually increase the dispersion radius. In this case, the lateral pulse jet impulse is so large compared to the trajectory tracking error, that firing a particular pulse jet tends to over corrects the tracking error. Contrasting Figures 13, 14, and 15 shows that as the trajectory tracking window size is increased, a greater value of jet impulse yields a steady decrease in the dispersion radius as the total number of pulse jets on the ring is increased.

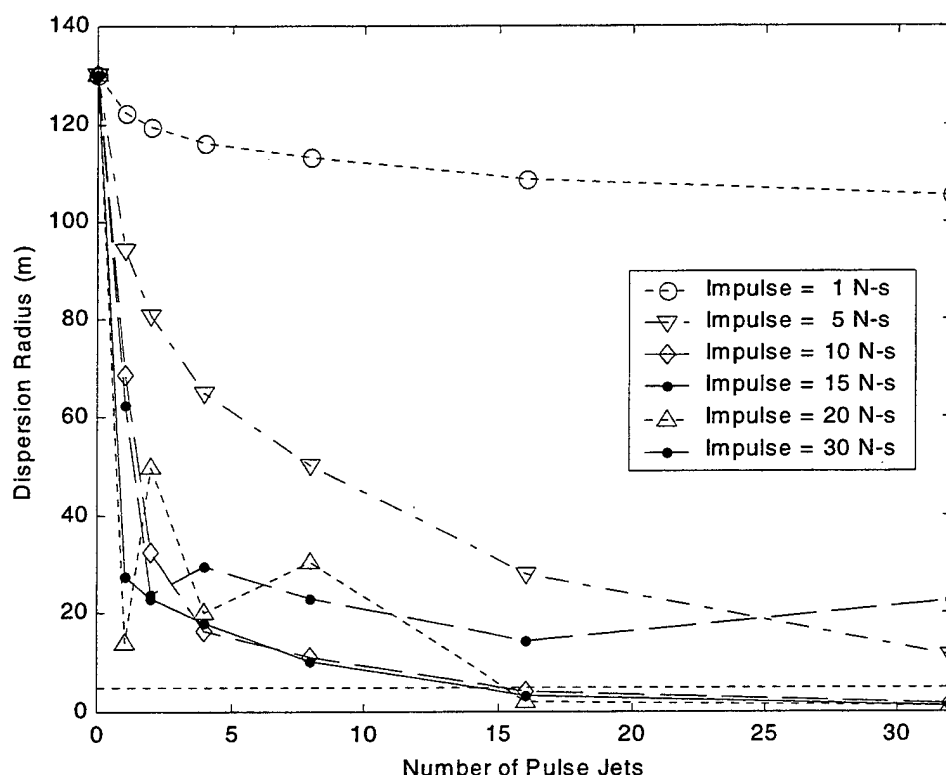


Figure 14. Dispersion radius vs. number of pulse jets and pulse jet impulse (trajectory tracking window size = 1.5 m).

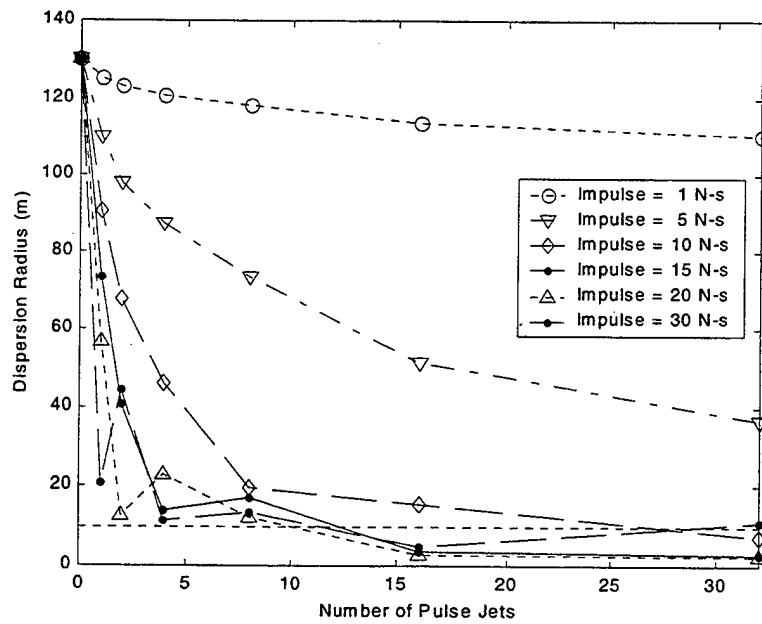


Figure 15. Dispersion radius vs. number of pulse jets and pulse jet impulse (trajectory tracking window size = 3.0 m).

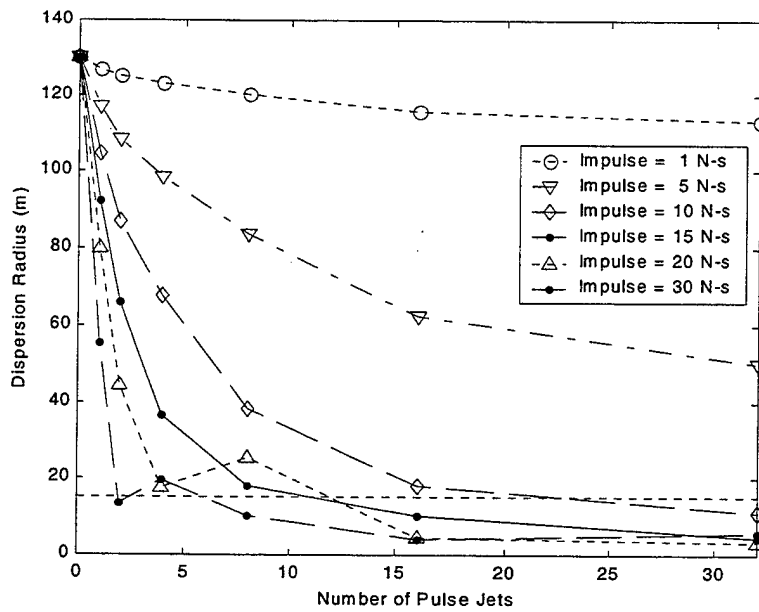


Figure 16. Dispersion radius vs. number of pulse jets and pulse jet impulse (trajectory tracking window size = 4.5 m).

Figure 17 shows the relationship between dispersion radius, number of pulse jets on the ring, and the total ring impulse for a trajectory tracking window size of 1.5 m. Each line on the figure represent lines of constant total ring impulse. For these traces, as the number of lateral pulse jets on the ring is increased, the impulse for an individual lateral pulse jet decreases proportionally so the total ring impulse remains constant. For relatively low total ring impulse, a single lateral pulse jet yields the lowest dispersion radius. The reason for this trend is that the effectiveness of a pulse jet on the trajectory decreases sharply as the projectile flies down range. Hence, a comparatively large and early trajectory correction provides more of an impact point modification than two pulses, each of half impulse strength, where one of the pulses occurs farther down range.

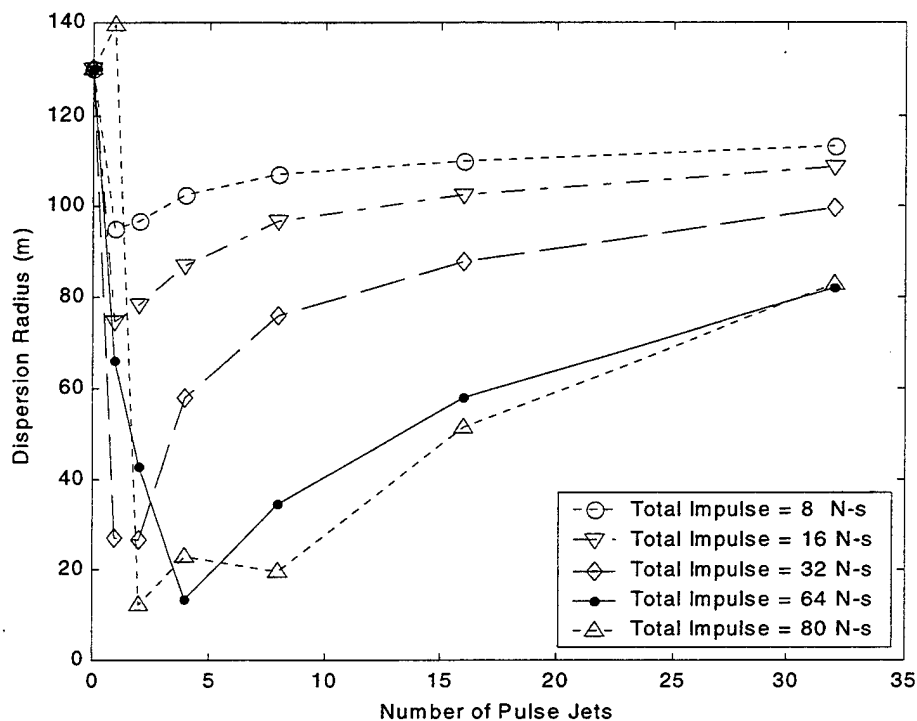


Figure 17. Dispersion radius vs. number of pulse jets and total ring impulse (trajectory tracking window size = 3.0 m).

As the total impulse on the ring is increased, the minimum dispersion radius is decreased. For relatively large total ring impulse, an optimum number of individual lateral pulse jets exists for a given trajectory tracking window size. In the example shown in Figure 16, a total ring impulse of 64 N-s split into four individual lateral pulse jets provides the optimum dispersion reduction. Figure 12 plots the dispersion radius vs. the number of pulse jets for three

different trajectory tracking window sizes. The total ring impulse for all data on the chart is 80 N-s. A single impulse increases the dispersion radius for trajectory tracking window sizes of 1.5 m and 3.0 m. This figure underlines the importance of properly selecting the number of pulse jets and the pulse jet impulse for a particular accuracy design requirement.

Figures 18 and 19 plot dispersion radius as a function of the atmospheric wind angle for the uncontrolled and controlled rocket configurations, respectively. An atmospheric wind angle of 0° corresponds to a direct head wind, whereas an angle of 180° represents a direct tail wind. The uncontrolled rocket configuration is insensitive to direct head and tail winds; in these cases, the rocket range is predominantly effected. On the other hand, side winds induce dispersion over 130 m. The controlled rocket configuration successfully suppresses dispersion to under 6 m for all wind directions.

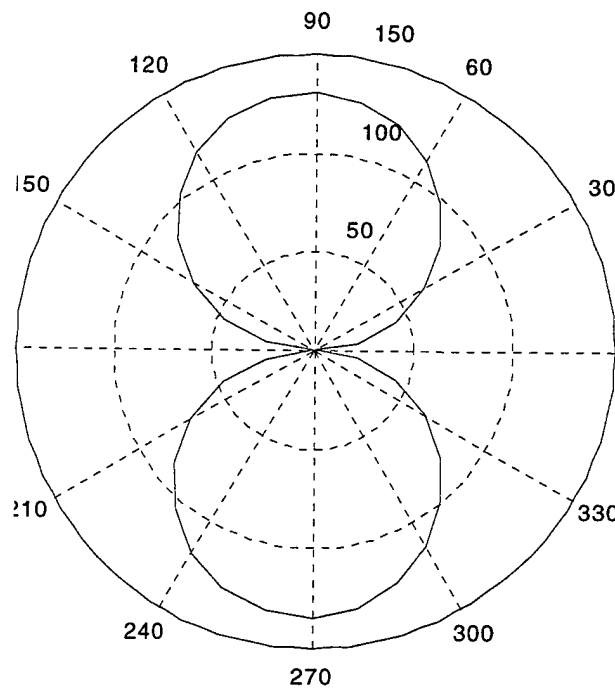


Figure 18. Dispersion radius vs. atmospheric wind direction for the uncontrolled rocket (atmospheric wind speed = 7.6 m/s, number of pulse jets = 32, pulse jet impulse = 20 N-s, trajectory tracking window size = 1.5 m).

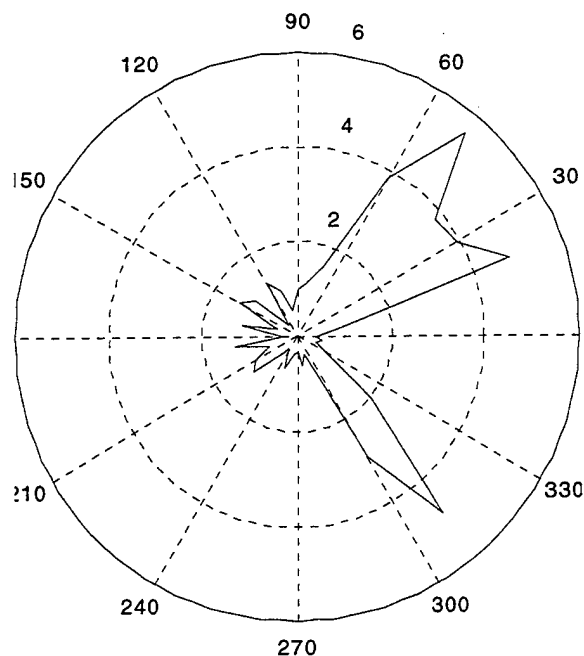


Figure 19. Dispersion radius vs. atmospheric wind direction for the controlled rocket (atmospheric wind speed = 7.6 m/s, number of pulse jets = 32, pulse jet impulse = 20 N-s, trajectory tracking window size = 1.5 m).

5. Conclusions

Using a previously validated six degree of freedom dynamic model of a direct-fire rocket, a drastic reduction in impact point dispersion using a lateral pulse jet control mechanism coupled to a trajectory tracking flight control system is demonstrated. The ability to improve dispersion performance must be weighed against the cost of installing an IMU sensor suite and a pulse jet ring onboard existing unguided direct fire-rockets. In designing a lateral pulse jet control system, the number of pulse jets and the pulse jet impulse must be carefully tuned against the desired impact point dispersion and the level of uncertainty within the rocket.

INTENTIONALLY LEFT BLANK.

6. References

1. Srivastava, B. "Lateral Jet Control of a Supersonic Missile: Computational and Experimental Comparisons." *Journal of Spacecraft and Rockets*, vol. 35, no. 2, pp. 141-146, 1998.
2. Srivastava, B. "Asymmetric Divert Jet Performance of a Supersonic Missile: Computational and Experimental Comparisons." *Journal of Spacecraft and Rockets*, vol. 36, no. 5, pp. 621-632, 1999.
3. Brandeis, J., and J. Gill. "Experimental Investigation of Super- and Hypersonic Jet Interaction on Missile Configurations." *Journal of Spacecraft and Rockets*, vol. 35, no. 3, pp. 296-302, 1998.
4. Harkins, T. E., and T. G. Brown. "Using Active Damping as a Precision-Enhancing Technology for 2.75-inch Rockets." ARL-TR-1772, U.S. Army Research Laboratory, Aberdeen Proving Ground, MD, 1999.
5. Gast, R., S. Morris, and M. Costello. "Simulation of Shot Impacts for the M1A1 Tank Gun." *Journal of Guidance, Control, and Dynamics*, vol. 23, no. 1, pp. 53-59, 2000.
6. Costello, M., and D. Anderson. "Effect of Internal Mass Unbalance on the Terminal Accuracy and Stability of a Projectile." Proceedings of the 1996 AIAA Flight Mechanics Conference, San Diego, CA, 1996.
7. Carter, R., W. Chase, and J. Whiteside. "Accuracy Analysis for the Advanced Rocket System." FTB-IR-14, U.S. Army Research, Development, and Engineering Center, Picatinny Arsenal, NJ, 1994.
8. Bellamy, R., W. Chase, and J. Whiteside. "Accuracy Analysis for the 2.75-inch MK66 Rocket." FTB-IR-23, U.S. Army Research, Development, and Engineering Center, Picatinny Arsenal, NJ, 1995.

INTENTIONALLY LEFT BLANK.

List of Symbols

x, y, z	Components of the position vector of center of mass of the composite body in an inertial reference frame.
ϕ, θ, ψ	Euler roll, pitch and yaw angles of the projectile.
u, v, w	Components of the velocity vector of the mass center of the composite body in the body reference frame.
p, q, r	Components of the angular velocity vector of the projectile in the body reference frame.
X, Y, Z	Total applied force components in the aft body reference frame.
L, M, N	Total applied moments about rocket mass center expressed in the aft body reference frame.
u_A, v_A, w_A	Components of the velocity of the mass center of the projectile with mean wind expressed in the body reference frame.
V_A	Magnitude of the velocity vector of the mass center of the projectile experienced with mean wind expressed in the body reference frame.
V_{MW}, σ_{MW}	Magnitude and wind factor of the mean atmospheric wind expressed in the initial reference frame.
ρ	Air density.
D	Rocket reference diameter.
T_{R_i}	i^{th} main rocket motor thrust.
T_{J_i}	i^{th} lateral pulse jet thrust.
$N_{RX_i}, N_{RY_i}, N_{RZ_i}$	i^{th} main rocket motor direction cosines in the body frame.
N_j	Number of individual lateral pulse jets.
e_{THRES}	Trajectory tracking window size.
Δt_{THRES}	Minimum required elapsed time between successive pulse jet firing.
δ_{THRES}	Pulse jet angle threshold.
t^*	Time of the most recent pulse jet firing.
θ_i	Angle between \bar{J}_B and the i^{th} pulse jet.

Δ	Pulse jet firing duration.
T	$\dot{\gamma}$ time constant.
C_{X0}	Zero yaw axial force aerodynamic coefficient.
C_{X2}	Yaw axial force aerodynamic coefficient.
C_{NA}	Normal force aerodynamic coefficient.
C_{DD}	Fin cant roll moment aerodynamic coefficient.
C_{LP}	Roll damping aerodynamic coefficient.
C_{MQ}	Pitch damping aerodynamic coefficient.

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
2	DEFENSE TECHNICAL INFORMATION CENTER DTIC DDA 8725 JOHN J KINGMAN RD STE 0944 FT BELVOIR VA 22060-6218
1	HQDA DAMO FDT 400 ARMY PENTAGON WASHINGTON DC 20310-0460
1	OSD OUSD(A&T)/ODDDR&E(R) R J TREW THE PENTAGON WASHINGTON DC 20301-7100
1	DPTY CG FOR RDA US ARMY MATERIEL CMD AMCRDA 5001 EISENHOWER AVE ALEXANDRIA VA 22333-0001
1	INST FOR ADVNCD TCHNLGY THE UNIV OF TEXAS AT AUSTIN PO BOX 202797 AUSTIN TX 78720-2797
1	DARPA B KASPAR 3701 N FAIRFAX DR ARLINGTON VA 22203-1714
1	US MILITARY ACADEMY MATH SCI CTR OF EXCELLENCE MADN MATH MAJ HUBER THAYER HALL WEST POINT NY 10996-1786
1	DIRECTOR US ARMY RESEARCH LAB AMSRL D D R SMITH 2800 POWDER MILL RD ADELPHI MD 20783-1197
1	DIRECTOR US ARMY RESEARCH LAB AMSRL DD 2800 POWDER MILL RD ADELPHI MD 20783-1197

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
1	DIRECTOR US ARMY RESEARCH LAB AMSRL CI AI R RECORDS MGMT 2800 POWDER MILL RD ADELPHI MD 20783-1145
3	DIRECTOR US ARMY RESEARCH LAB AMSRL CI LL 2800 POWDER MILL RD ADELPHI MD 20783-1145
1	DIRECTOR US ARMY RESEARCH LAB AMSRL CI AP 2800 POWDER MILL RD ADELPHI MD 20783-1197
<u>ABERDEEN PROVING GROUND</u>	
4	DIR USARL AMSRL CI LP (BLDG 305)

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
3	AIR FORCE RSRCH LAB MUNITIONS DIR AFRL/MNAV G ABATE 101 W EGLIN BLVD STE 219 EGLIN AFB FL 32542
1	CDR WL/MNMF D MABRY 101 W EGLIN BLVD STE 219 EGLIN AFB FL 32542-6810
20	OREGON STATE UNIVERSITY DEPT OF MECHL ENGRG M COSTELLO CORVALLIS OR 97331
4	CDR US ARMY ARDEC AMSTA AR CCH J DELORENZO S MUSALI R SAYER P DONADIO PICATINNY ARESENAL NJ 07806-5000
7	CDR US ARMY TANK MAIN ARMAMENT SYSTEM AMCPM TMA D GUZIEWICZ R DARCEY C KIMKER R JOINSON E KOPOAC T LOUZIERIO C LEVECHIA PICATINNY ARESENAL NJ 07806-5000
1	CDR USA YUMA PROV GRND STEYT MTW YUMA AZ 85365-9103
1	DIR BENET LABORATORIES SMCWV QAR T MCCLOSKEY WATERVLIET NY 12189-5000

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
10	CDR US ARMY TACOM AMCPEO HFM AMCPEO HFM F AMCPEO HFM C AMCPM ABMS AMCPM BLOCKIII AMSTA CF AMSTA Z AMSTA ZD AMCPM ABMS S W DR PATTISON A HAVERILLA WARREN MI 48397-5000
1	CDR USAOTEA CSTE CCA DR RUSSELL ALEXANDRIA VA 22302-1458
2	DIR US ARMY ARMOR CTR & SCHL ATSB WP ORSA A POMEY ATSB CDC FT KNOX KY 40121
1	CDR US ARMY AMCCOM AMSMC ASR A MR CRAWFORD ROCK ISLAND IL 61299-6000
2	PROGRAM MANAGER GROUND WEAPONS MCRDAC LTC VARELA CBGT QUANTICO VA 22134-5000
4	COMMANDER US ARMY TRADOC ATCD T ATCD TT ATTE ZC ATTG Y FT MONROE VA 23651-5000

NO. OF
COPIES ORGANIZATION

1 NAWC
F PICKETT
CODE C2774 CLPL
BLDG 1031
CHINA LAKE CA 93555

1 NAVAL ORDNANCE STATION
ADVNC'D SYS TCHNLGY BRNCH
D HOLMES
CODE 2011
LOUISVILLE KY 40214-5001

1 NAVAL SURFACE WARFARE CTR
F G MOORE
DAHLGREN DIVISION
CODE G04
DAHLGREN VA 22448-5000

1 US MILITARY ACADEMY
MATH SCI CTR OF EXCELLENCE
DEPT OF MATHEMATICAL SCI
MDN A MAJ DON ENGEN
THAYER HALL
WEST POINT NY 10996-1786

3 DIR
SNL
A HODAPP
W OBERKAMPF
F BLOTTNER
DIVISION 1631
ALBUQUERQUE NM 87185

3 ALLIANT TECH SYSTEMS
C CANDLAND
R BURETTA
R BECKER
7225 NORTHLAND DR
BROOKLYN PARK MN 55428

3 DIR USARL
AMSRL SE RM
H WALLACE
AMSRL SS SM
J EIKE
A LADAS
2800 POWDER MILL RD
ADELPHI MD 20783-1145

NO. OF
COPIES ORGANIZATION

1 OFC OF ASST SECY OF ARMY
FOR R&D
SARD TR
W MORRISON
2115 JEFFERSON DAVIS HWY
ARLINGTON VA 22202-3911

2 CDR USARDEC
AMSTA FSP A
S DEFEQ
R SICIGNANO
PICATINNY ARESENAL NJ
07806-5000

2 CDR USARDEC
AMSTA AR CCH A
M PALATHINGAL
R CARR
PICATINNY ARESENAL NJ
07806-5000

5 TACOM ARDEC
AMSTA AR FSA
K CHIEFA
AMSTA AR FS
A WARNASCH
AMSTA AR FSF
W RYBA
AMSTA AR FSP
S PEARCY
J HEDDERICH
PICATINNY ARESENAL NJ
07806-5000

5 CDR US ARMY MICOM
AMSMI RD
P JACOBS
P RUFFIN
AMSMI RD MG GA
C LEWIS
AMSMI RD MG NC
C ROBERTS
AMSMI RD ST GD
D DAVIS
RSA AL 35898-5247

3 CDR US ARMY AVN TRP CMD
DIRECTORATE FOR ENGINEERING
AMSATR ESW
M MAMOUD
M JOHNSON
J OBERMARK
RSA AL 35898-5247

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
1	DIR US ARMY RTTC STERT TE F TD R EPPS BLDG 7855 REDSTONE ARSENAL AL 38598-8052
2	STRICOM AMFTI EL D SCHNEIDER R COLANGELO 12350 RESEARCH PKWY ORLANDO FL 32826-3276
1	CDR OFFICE OF NAVAL RES CODE 333 J GOLDWASSER 800 N QUINCY ST RM 507 ARLINGTON VA 22217-5660
1	CDR US ARMY RES OFFICE AMXRO RT IP TECH LIB PO BOX 12211 RESEARCH TRIANGLE PARK NJ 27709-2211
4	CDR US ARMY AVN TRP CMD AVIATION APPLIED TECH DIR AMSATR TI R BARLOW E BERCHER T CONDON B TENNEY FT EUSTIS VA 23604-5577
3	CDR NAWC WEAPONS DIV CODE 543400D S MEYERS CODE C2744 T MUNSINGER CODE C3904 D SCOFIELD CHINA LAKE CA 93555-6100
1	CDR NSWC CRANE DIVISION CODE 4024 J SKOMP 300 HIGHWAY 361 CRANE IN 47522-5000

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
1	CDR NSWC DAHLGREN DIV CODE 40D J BLANKENSHIP 6703 WEST HWY 98 PANAMA CITY FL 32407-7001
1	CDR NSWC J FRAYSEE D HAGEN 17320 DAHLGREN RD DAHLGREN VA 22448-5000
5	CDR NSWC INDIAN HEAD DIV CODE 40D D GARVICK CODE 4110C L FAN CODE 4120 V CARLSON CODE 4140E H LAST CODE 450D T GRIFFIN 101 STRAUSS AVE INDIAN HEAD MD 20640-5000
1	CDR NSWC INDIAN HEAD DIV LIBRARY CODE 8530 BLDG 299 101 STRAUSS AVE INDIAN HEAD MD 20640
2	US MILITARY ACADEMY MATH SCI CTR OF EXCELLENCE DEPT OF MATHEMATICAL SCI MDN A MAJ D ENGEN R MARCHAND THAYER HALL WEST POINT NY 10996-1786
3	CDR US ARMY YUMA PG STEYP MT AT A A HOOOPER STEYP MT EA YUMA AZ 85365-9110

NO. OF
COPIES ORGANIZATION

6 CDR NSWG
INDIAN HEAD DIV
CODE 570D J BOKSER
CODE 5710 L EAGLES
J FERSUSON
CODE 57 C PARIS
CODE 5710G S KIM
CODE 5710E S JAGO
101 STRAUSS AVE ELY BLDG
INDIAN HEAD MD 20640-5035

1 BRUCE KIM
MICHIGAN STATE UNIVERSITY
2120 ENGINEERING BLDG
EAST LANSING MI 48824-1226

2 INDUSTRIAL OPERATION CMD
AMFIO PM RO
W MCKELVIN
MAJ BATEMAN
ROCK ISLAND IL 61299-6000

3 PROGRAM EXECUTIVE OFFICER
TACTICAL AIRCRAFT PROGRAMS
PMA 242 1
MAJ KIRBY R242
PMA 242 33
R KEISER (2 CPS)
1421 JEFFERSON DAVIS HWY
ARLINGTON VA 22243-1276

1 CDR NAVAL AIR SYSTEMS CMD
CODE AIR 471
A NAKAS
1421 JEFFERSON DAVIS HWY
ARLINGTON VA 22243-1276

4 ARROW TECH ASSOCIATES INC
R WHYTE
A HATHAWAY
H STEINHOFF
1233 SHELBOURNE RD SUITE D8
SOUTH BURLINGTON VT 05403

3 US ARMY AVIATION CTR
DIR OF COMBAT DEVELOPMENT
ATZQ CDM C
B NELSON
ATZQ CDC C
T HUNDLEY
ATZQ CD
G HARRISON
FORT RUCKER AL 36362

NO. OF
COPIES ORGANIZATION

ABERDEEN PROVING GROUND

3 CDR
USA ARDEC
AMSTA AR FSF T
R LIESKE
J WHITESIDE
J MATTS
BLDG 120

1 CDR
USA TECOM
AMSTE CT
T J SCHNELL
RYAN BLDG

3 CDR
USA AMSAA
AMXS Y EV
G CASTLEBURY
R MIRABELLE
AMXS Y EF
S MCKEY

49 DIR USARL
AMSRL WM
I MAY
T ROSENBERGER
AMSRL WM BA
W HORST JR
W CIEPELLA
F BRANDON
T BROWN (5 CPS)
L BURKE
J CONDON
B DAVIS
T HARKINS (5 CPS)
D HEPNER
V LEITZKE
M HOLLIS
A THOMPSON
G BROWN
AMSRL WM BB
B HAUG
AMSRL WM BC
P PLOSTINS (4 CPS)
G COOPER
B GUIDOS
J SAHU
M BUNDY
K SOENCKSEN
D LYON

NO. OF
COPIES ORGANIZATION

ABERDEEN PROVING GROUND (CONTD)

AMSRL WM BC
J BENDER
J NEWILL
J GARNER
V OSKAY
S WILKERSON
W DRYSDALE
R COATES
A MIKHAL
J WALL
AMSRL WM BD
B FORCH
AMSRL WM BE
M SCHMIDT
AMSRL WM BF
J LACETERA
P HILL
AMSRL WM BR
C SHOEMAKER
J BORNSTEIN

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project(0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE April 2001		3. REPORT TYPE AND DATES COVERED Final, October 2000–February 2001
4. TITLE AND SUBTITLE Dispersion Reduction of a Direct-Fire Rocket Using Lateral Pulse Jets			5. FUNDING NUMBERS 1L162618.H80	
6. AUTHOR(S) Thanat Jitraphai* and Mark Costello*				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) * Oregon State University Corvallis, Oregon 97331			8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAMES(S) AND ADDRESS(ES) U.S. Army Research Laboratory ATTN: AMSRL-WM-BC Aberdeen Proving Ground, MD 21005-5066			10. SPONSORING/MONITORING AGENCY REPORT NUMBER ARL-CR-465	
11. SUPPLEMENTARY NOTES * Oregon State University				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) <p>The impact point dispersion of a direct-fire rocket can be drastically reduced with a ring of appropriately sized lateral pulse jets coupled to a trajectory tracking flight control system. The system is shown to work well against uncertainty in the form of initial off-axis angular velocity perturbations as well as atmospheric winds. In an example case, dispersion was reduced by a factor of 100. Dispersion reduction is a strong function of the number of individual pulse jets, the pulse jet impulse, and the trajectory tracking window size. Properly selecting these parameters for a particular rocket and launcher combination is required to achieve optimum dispersion reduction. For relatively low pulse jet impulse, dispersion steadily decreases as the number of pulse jets is increased or as the pulse jet impulse is increased. For a fixed total pulse jet ring impulse, a single pulse is the optimum pulse jet configuration when the pulse jet ring impulse is small due to the fact that the effect of a pulse on the trajectory of a rocket decreases as the round flies down range.</p>				
14. SUBJECT TERMS guided munition			15. NUMBER OF PAGES 34	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED	18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED	20. LIMITATION OF ABSTRACT UL	

INTENTIONALLY LEFT BLANK.

USER EVALUATION SHEET/CHANGE OF ADDRESS

This Laboratory undertakes a continuing effort to improve the quality of the reports it publishes. Your comments/answers to the items/questions below will aid us in our efforts.

1. ARL Report Number/Author ARL-CR-465 (POC: Plostins) Date of Report April 2001

2. Date Report Received _____

3. Does this report satisfy a need? (Comment on purpose, related project, or other area of interest for which the report will be used.) _____

4. Specifically, how is the report being used? (Information source, design data, procedure, source of ideas, etc.) _____

5. Has the information in this report led to any quantitative savings as far as man-hours or dollars saved, operating costs avoided, or efficiencies achieved, etc? If so, please elaborate. _____

6. General Comments. What do you think should be changed to improve future reports? (Indicate changes to organization, technical content, format, etc.) _____

CURRENT
ADDRESS

Organization

Name

E-mail Name

Street or P.O. Box No.

City, State, Zip Code

7. If indicating a Change of Address or Address Correction, please provide the Current or Correct address above and the Old or Incorrect address below.

OLD
ADDRESS

Organization

Name

Street or P.O. Box No.

City, State, Zip Code

(Remove this sheet, fold as indicated, tape closed, and mail.)

(DO NOT STAPLE)